
Mounting & Maintenance

OSPW X

For SRAM Rival & Force 1 Type 3



CERAMICSPEED

Derailleur compatibility

The OSPW X cage fits all Rival1 and Force1 derailleurs with Type 3 clutch regardless of the cage length. The cage lock position needs to be in the 8 o'clock position (not 5 o'clock) for complete functionality.

The cage is NOT compatible with Type 2.1.



Type 2.1



Type 3

Cassette sizes:

OSPW X Systems support from 10 to max. 42 teeth. It is possible to use all combinations between these limits.

It is NOT possible to use a 50 tooth cassette.


Tools:

A: 2,5mm Allen key

B: 3mm Allen key

C: Chain tool

D: Torque wrench for 3Nm & 4Nm

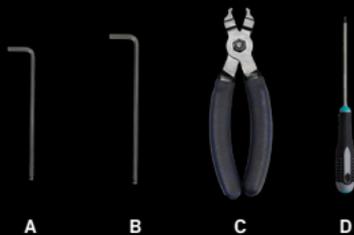

ATTENTION

To guarantee the best possible shifting performance with the OSPW X you must ensure that the cable and housing is setup correctly per the original manufacture's specification. Poor cable performance and/or housing routing from the shifter to the derailleur can impede accurate derailleur actuation.

Maintenance

No set of rules can be made for how often your Oversized Pulley Wheels are to be maintained. Maintenance frequency depends on the weather conditions that you are riding in.

A worn chain will increase the wear on the pulley wheels significantly, so make sure that you change your chain before it is completely worn out. Under



normal conditions, we recommend that you service the Oversized Pulley Wheels when you have ridden under wet conditions, washed your bike or each time you lubricate the chain. For normal maintenance, add a drop of oil into the lubrication points (see the page 3) for optimal performance. Make sure to position the OSPW System horizontally to ensure that the oil reaches the Oversized Pulley Wheel bearings.

We recommend the use of CeramicSpeed Oil on the OSPW X System. This can be purchased from the CeramicSpeed dealers worldwide or from our webshop. Watch our maintenance video on ceramicspeed.com in the Support section.


When travelling, your OSPW X System will not fit in the bike travelling bag. We recommend that you dismount the whole rear derailleur and pack it aside.

Extended Maintenance

Approximately once every half a year we recommend that you perform an extended maintenance. In this case, you should dismount the Oversized Pulley Wheels from the cage, remove the seals from both sides and clean all parts in a shaker with degreaser. After cleaning, dry the components off, put two drops of oil onto the CeramicSpeed Balls, place the seals back on and remount the Oversized Pulley Wheels. When dismounting the cage plates, you will need a 2.5 mm Allen Key for the pulley wheel bolts (see page 3) and a 2 mm Allen key for the tower bolts. To remount the screws, tighten the pulley wheel screws up to a max torque of 1 Nm and the tower bolts up to 0.3 Nm. For this, a torque tool is recommended. If you're riding in wet and muddy conditions, we recommend you to perform an extended maintenance more frequently and replace oil with All Round Grease for better protection.

Mounting Manual

To ensure the very best in riding performance it is vital that your new OSPW X System is mounted correctly. Follow these instructions to install your OSPW X System for SRAM Rival & Force 1 Type 3.



1. Rotate the stock pulley cage forward and engage the Cage Lock. Remove the chain.



2. Remove the stop screw with a 3mm Allen Key, this will not be reused. Shift up 2-3 gears.



3. Disengage the Cage Lock and release the spring tension to zero. The cage will unwind a complete revolution.



4. Remove the cage mounting screw with a 3mm Allen key and set aside the original cage. You will reuse the cage mounting screw.



5. Remove the plastic cap if it did not come off with the derailleur cage and set aside (not to be used with OSPW X). You should now see the pulley cage tension spring.



6. Unbox the OSPW X and remove the silver CeramicSpeed stop screw with a 2,5mm Allen key.



7. There are 2 holes for spring tension. We recommend Low tension setting (marked 'L' at top) to minimize drive train friction. Move the spring tension to the standard setting (at bottom) if you experience any issues such as slow shifting response or drop a chain.



8. Once the spring tension setting is selected, align the OSPW X, spring and derailleur body together. Install the factory cage mounting screw, and torque to 4Nm.




9. Turn the cage clockwise and secure the cage with the Cage Lock. Mount the CeramicSpeed stop screw with a 2,5mm Allen key (torque to 3Nm).

Chain length

If you are using a 44 tooth or larger chain ring you may not be able to overlap the ends of the chain for measurement. You do not need to add any links to a stock chain, a full length chain (114 links for SRAM, 116 links for KMC) is sufficient for use.


Recommendation on upper pulley clearance on the largest cog (adjusting of B-limit) = 10-15mm depending on cassette size.



STEP 1: Place the chain on the smallest cog on the cassette. To find the correct chain length, pull the two chain ends together, just as you would when needing to cut a chain to length. The lower part of the cage should start to move downwards, away from the cassette, as referenced in the second image.



STEP 2: When tension is applied on the chain and the OSPW X System appears to be aligned as the diagram above, the chain needs to be cut (1 link shorter than step 1) and connected by the required amount of links in order to achieve sufficient tension in this gear combination (always the small cog on the cassette).

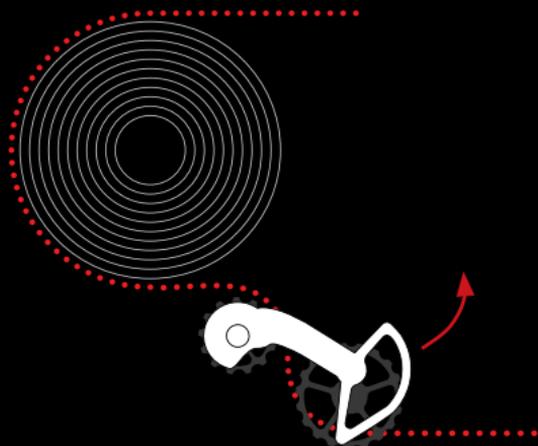

STEP 3: With the chain now cut to length it is important to test the clearance of the OSPW X System when the rear derailleur is set in the largest cog on the cassette. Just as the arrow indicates the cage should be able to rotate counter clockwise. It is important that there is some clearance between the upper pulley wheel of the OSPW X System and the largest cog on the cassette. If you find the clearance is not enough, adjust the B-tension accordingly.

Up to 6 years warranty

Thankfully, we do not have to deal with warranty issues often. Nevertheless, we are happy to introduce you to our comprehensive warranty program.

Standard products 4 years

Bottom Brackets
Pulley Wheels
Wheel Kits
Headsets
Oversized Pulley Wheel Systems
Single Bearings

Coated products 6 years

Bottom Brackets
Pulley Wheels
Wheel Kits
Headsets
Oversized Pulley Wheel Systems
Single Bearings

We are committed to manufacturing and delivering the best ceramic bearing products in the industry. Should your CeramicSpeed product not live up to your expectations, and this is caused by defects in materials and/or workmanship, we encourage you to contact us.

Register your product within the first 30 days of purchase on ceramicspeed.com/sport under the section Support. Should you thereafter, and within the warranty period need to file a claim, please return to the same section on our website and fill in your claim. We will always strive to revert to you concerning your claim within 24 hours.